


## Product Datasheet

Product ID: OBC-022-1KW-4

# Biconical Antenna

## OBC-022-1KW-4



Biconical antenna is a vertically polarized omnidirectional antenna. Its frequency range is 20MHz to 200 MHz. its pattern stability is better.Biconical antenna model OBC-022-1KW-4 is used for transmission and immunity test to meet various EMC standards. Its broadband characteristics make it an ideal choice for a wide range of EMI testing applications, including demonstrating compliance with FCC, CE, MIL-STD, RTCAD-160 and other requirements.

OBC-022-1KW-4 biconical EMC broadband antenna has durable aluminum alloy, and we powder coated them to improve corrosion resistance.

The OBC-022-1KW-4 model is used for radiation and immunity testing to meet various EMC standards. Its frequency range is 20 MHz to 200 MHz. The broadband characteristic of biconical antenna makes it an ideal choice for scanning measurement and automatic measurement systems.Biconical antennas can be used for many applications, in which half-wavedipoles have been used traditionally.An enormous reduction of measurement time can be achieved,because the time consuming tuning of the antenna elements to the half wavelength is not needed, an important condition for swept broadband measurements. In typical dipole applications several discrete frequencies are measured, in contrast the bi conical antenna allows continuous sweeps, where site anomalies are discovered much easier.

Notwithstanding the above applications, the OBC-022-1KW-4 can also be used for test site comparisons, shielding effectiveness tests of large enclosures, field monitoring, site surveys and other general purposes.



### Features

Low return loss


Linear gain with frequency

EMC and EMI testing

Radio link testing

### Product Dimensions

1940.0

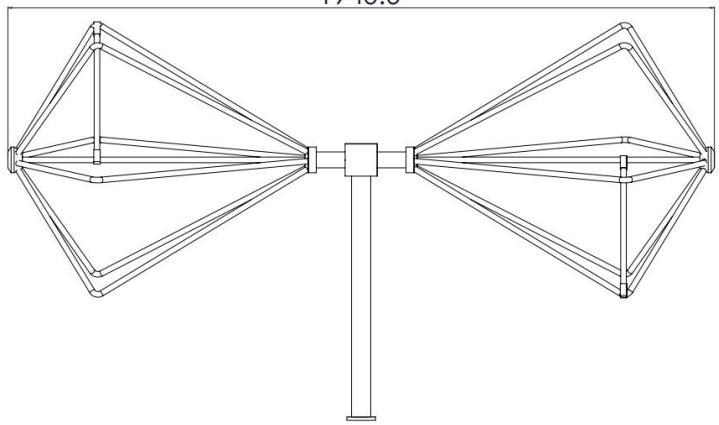

### Applications

Broadband RX-Antenna for Emission Testing (20-200 MHz)

TX-Antenna for Immunity testing

especially at low frequencies

### Electrical Specifications

|                   |                 |
|-------------------|-----------------|
| Frequency Range   | ( 20-200 ) MHz  |
| Nominal Impedance | 50Ω             |
| Polarization      | Linear          |
| Connector         | N type female   |
| power Handling    | 1 KW            |
| VSWR              | 2.0:1           |
| Impedance         | 50 Ohms         |
| Pattern Type      | Omnidirectional |
| Length(mm )       | 1940            |
| Balun Type        | Transform.Ratio |
|                   | 4:1             |

### Free-Space Calibration, 50 ohm far-field >3m

